


INSTALLATION INSTRUCTIONS

XYLUX® LR



Dimensions (mm)

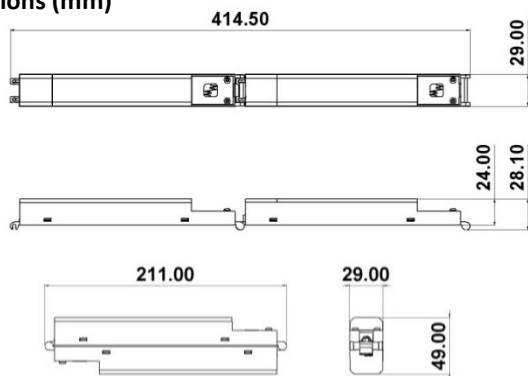


230V ac 50/60Hz

IP30


ta: 0°C...+35°C

Lamphead (mm)

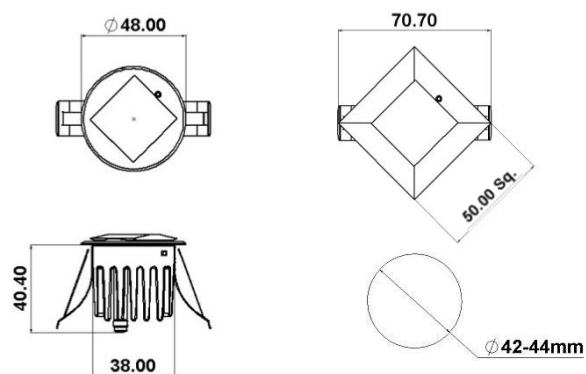






Ceiling cut-out dimension
Suitable for ceiling thickness of 15mm-35mm








LR1 & LR7 Variants Only

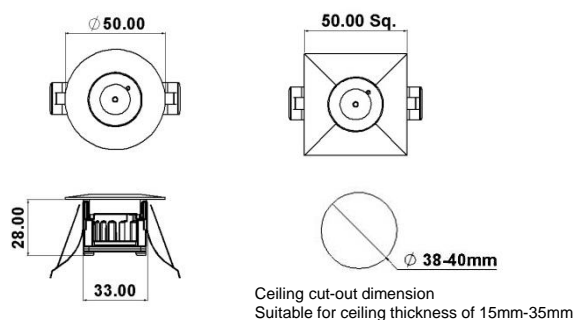

Ceiling cut-out dimension
Suitable for ceiling thickness of 15mm-35mm

LR4 Variants Only

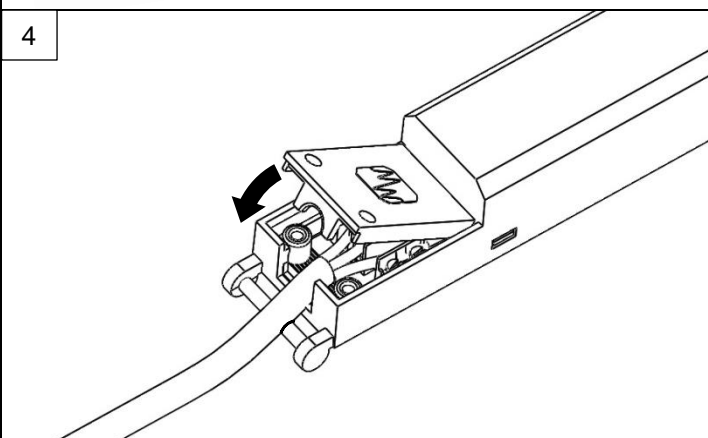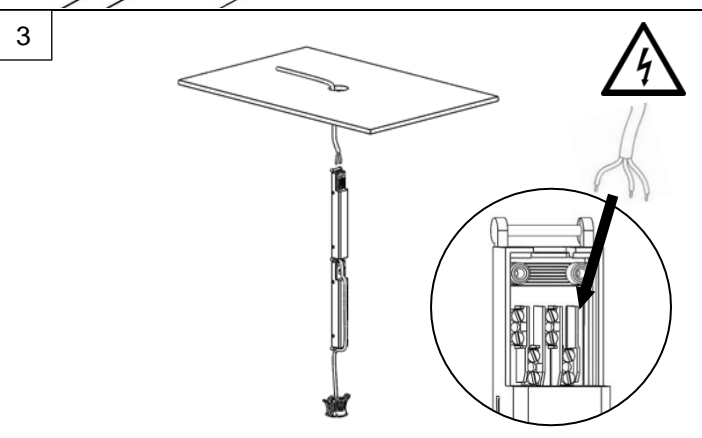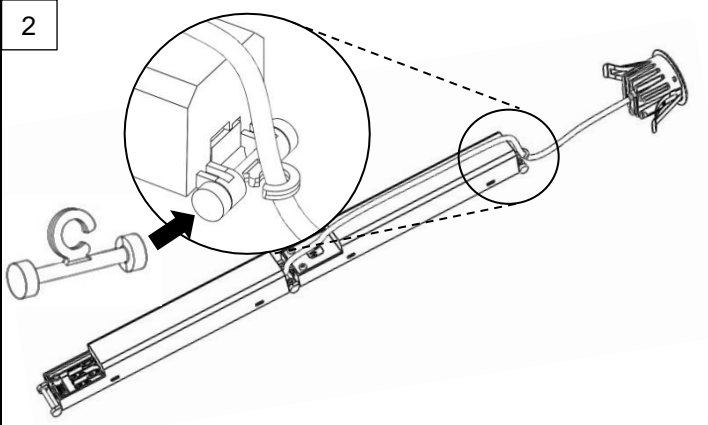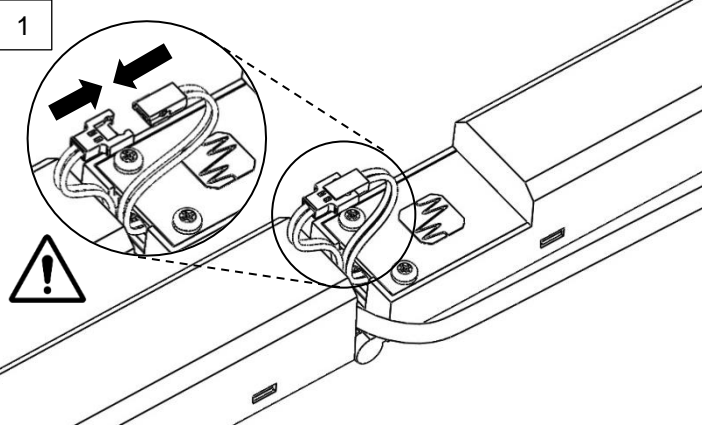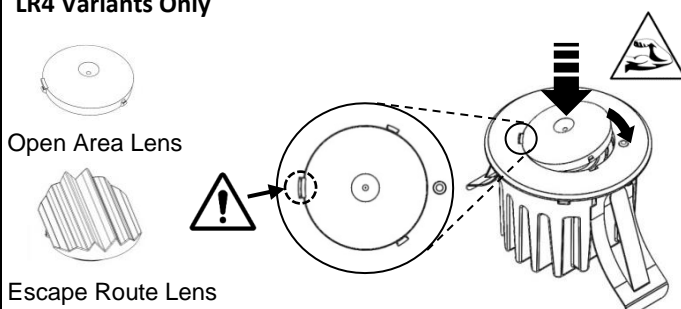
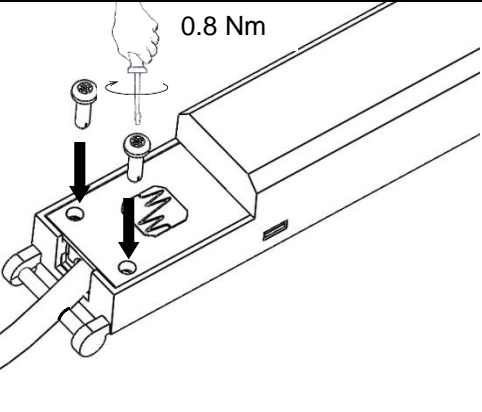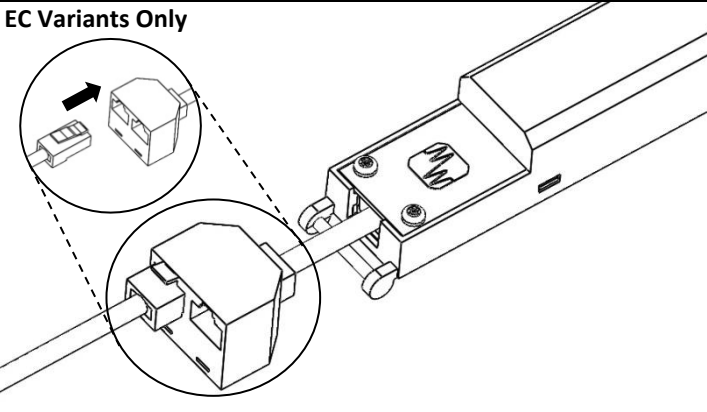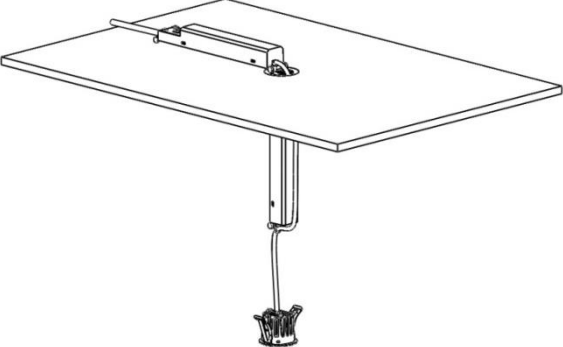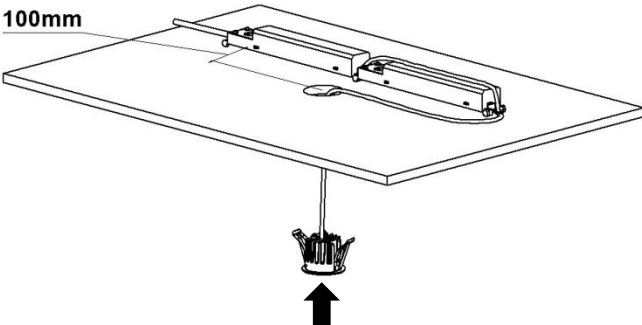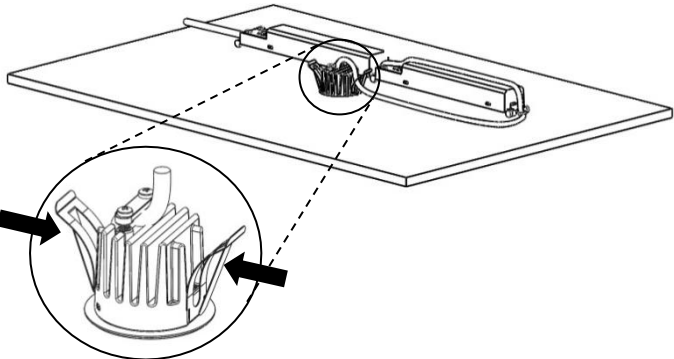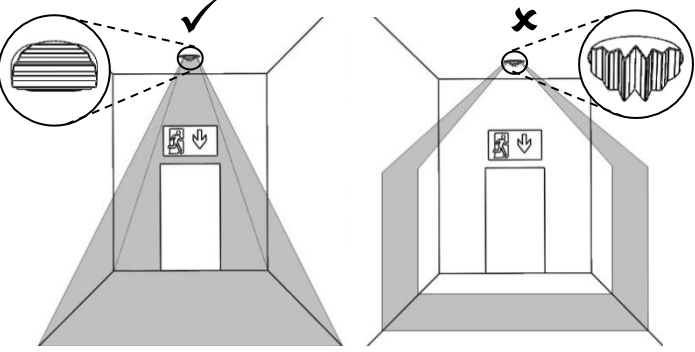
<p>5</p>  <p>0.8 Nm</p>	<p>EC Variants Only</p> 
<p>6</p> 	<p>7</p>  <p>100mm</p>
<p>8</p> 	<p>Escape Route Variants (LR4 Only)</p>  <p>Ensure lens choice and orientation matches approved lighting design</p>
<p>Cable Size & Strip Length</p> <p>C.S.A: $\leq 1.5\text{mm}^2$ Solid conductor or 7 stranded wire ends</p> <p>EC Version Only: Standard CAT 5e cable or above with RJ45 connector</p>  <p>7mm</p>	<p>Additional Information</p> <ul style="list-style-type: none"> LED Lamphead is non-replaceable, once lamphead reaches its end-of-life the whole Luminaire will need to be replaced Luminaire is suitable for indoor use ONLY Refer to the user guide on mackwell website for further commissioning and functionality information. For Battery replacement order codes please refer to datasheet Basic insulation is provided between live and DALI control conductors. LR1, LR7 only: The luminaire should be positioned so that prolonged staring into the luminaire at a distance closer than 0.24m is not expected. LR6 only: The luminaire should be positioned so that prolonged staring into the luminaire at a distance closer than 1.34m is not expected. LR4/AU only: The luminaire should be positioned so that prolonged staring into the luminaire at a distance closer than 0.24m is not expected.