





Features

- Highlight SMD2835 + flexible FPC
- CRI80+/90+
- super length connection
- High brightness 1450~1700lm/m (442~518lm/ft)
- Light efficiency up to 115lm/W
- Precise cutting 50mm/unit (0.164ft/unit)
- Waterproof: IP20/IP66/IP67
- Working time≥50000H
- Suitable for various dimming controllers

Standard CCT



Narrow spectrum

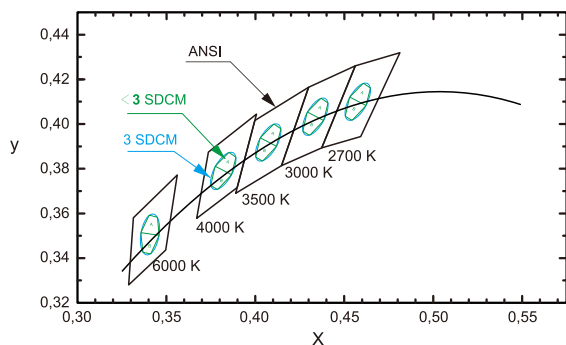

Impressive color consistency within 3 Step
MacAdam in the center BIN on the Planck
Locus over each individual LED, One Bin Only

Various waterproof solution




BV standard product

help to set up an energy conservation, flexible and multifunctional home lighting ,
the product with the features of low power, high brightness, high light efficiency,
high CRI, high waterproof and super length connection, various of connection
accessories and dimming control systems are for choice


Parameter

Input voltage	24Vdc
Beam angle	120°
CCT	2700K/3000K/4000K/6000K (2300K/3500K/5000K)
CRI	80+/90+
Power	9.6W/m (2.93W/ft)
Current	0.4A/m (0.122A/ft)
Brightness	966~1133lm/m (294~345lm/ft)
Length / reel	10M (32.8ft)
Cut length	50mm/unit (0.164ft/unit)
IP grade	IP20/IP66/IP67
Operating Temperature	-20°C ~ +45°C
Storage temperature	0°C ~ +60°C
Environment humidity	40-70% RH

Test report

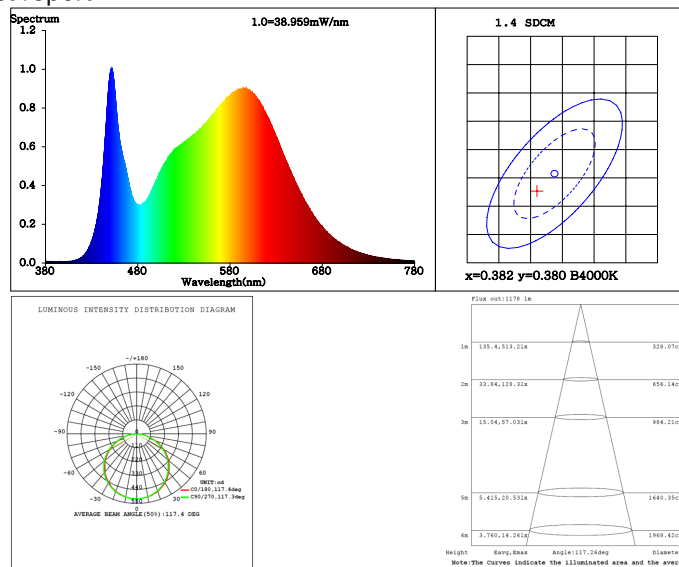

Dimension

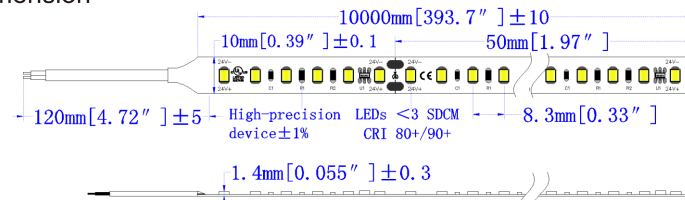

Above parameters allow ±10% floating

